

AUX INPUT MODULE FOR HELIX DSP PRO

Congratulations!

Dear Customer,

congratulations on your purchase of this high-quality HELIX EXTENSION CARD. This module is produced by using the latest technology. We wish you many hours of enjoyment with your new HELIX product.

Yours,
AUDIOTECH FISCHER

General installation instructions for HELIX components

To prevent damage to the unit / module and possible injury, read this manual carefully and follow all installation instructions. This product has been checked for proper function prior to shipping and is guaranteed against manufacturing defects.

Before starting your installation, disconnect the battery's negative terminal and all cables from the device to prevent damage to the unit / module, fire and / or risk of injury. For a proper performance and to ensure full warranty coverage, we strongly recommend to get this product installed by an authorized HELIX dealer.

Install the HEC module only in the designated device and its specific slot. Using the HEC module in other devices or slots can result in damage of the HEC module, the amplifier, the head unit / radio or other connected devices!

Technical data

AUX input:	3.5 mm jack
Input Sensitivity:	200 mV
Input impedance:	1 kOhm
A/D converter:	48 kHz / 24 Bit
Digital optical output:	SPDIF with 48 kHz / 24 Bit

Mounting information

1. First disconnect all cables from the device.
2. Untighten the ten Phillips head screws of the bottom plate and remove it.
3. Dismantle the side panel by removing the marked screws with a screwdriver:





4. Remove the nut from the AUX socket of the HEC module.

5. Insert the HEC module into the marked slot:



6. Make sure that the HEC module is installed properly and all pins are fully inserted into the socket:

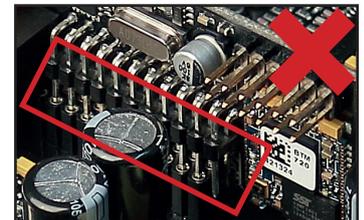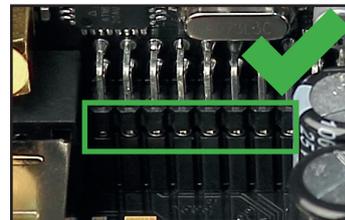

7. Fix the new side panel which is delivered with the HEC module with the screws. Reinsert the bottom plate and fix it, too.

8. Put the nut on the AUX socket and bolt it to the side panel. **Caution!** Do not overtighten the nut as this may damage the socket!



9. Reconnect all cables to the device.

Signal routing of the HEC module

As soon as the HEC module is installed, it is automatically detected by the device and the Status LED on the HEC module will light up green. Now you can allocate the HEC to the desired outputs in the "AUX Routing" matrix.



Several new features are visible in the DSP PC-Tool after installing a HEC module.

The optical SPDIF output of the HEC AUX IN module

The installation of the HEC module adds as well an additional digital optical SPDIF output to your device. This output allows to transmit any unprocessed input or processed output signals to other devices.



A new matrix "Optical Output Routing" appears in the "Input and Output Configuration" page in which you can make your desired settings.



The digital output delivers an uncoded stereo PCM signal with 48 kHz / 24 Bit.

Warranty disclaimer

The limited warranty comply with legal regulations. Failures or damages caused by overload or improper use are not covered by the warranty. Please return the defective product only with a valid proof of purchase and a detailed malfunction description. Technical specifications are subject to change! Errors are reserved!

For damages on the vehicle and the device, caused by handling errors of the module, we can't assume liability. These devices are certified for the use in vehicles within the European Community (EC).