

## 29-025 – Self pin universal patch lead

**InCarTec**



Look at the diagrams












Look at the diagrams

Use either the 3.5mm jack plug or the single Brown wire in pin locations 1,2 & 3

Use the link leads to suit the type of head unit you are fitting.

Carefully lift the latch on the plastic housing to remove a link lead

**WHEN FINISHED ALWAYS PLUG THE PATCH LEAD TO THE CONTROL BOX FIRST, BEFORE YOU CONNECT THE CAR HARNESS TO THE POWER**

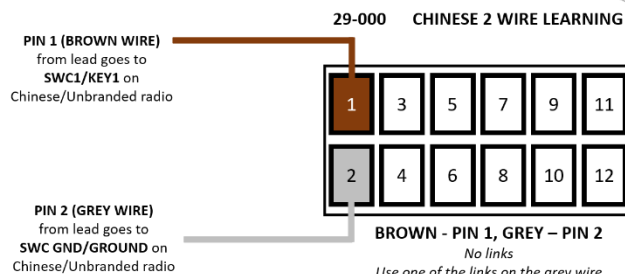

## 29-025 – Self pin universal patch lead

**InCarTec**



Look at the diagrams












Look at the diagrams


Use either the 3.5mm jack plug or the single Brown wire in pin locations 1,2 & 3

Use the link leads to suit the type of head unit you are fitting.

Carefully lift the latch on the plastic housing to remove a link lead


**WHEN FINISHED ALWAYS PLUG THE PATCH LEAD TO THE CONTROL BOX FIRST, BEFORE YOU CONNECT THE CAR HARNESS TO THE POWER**

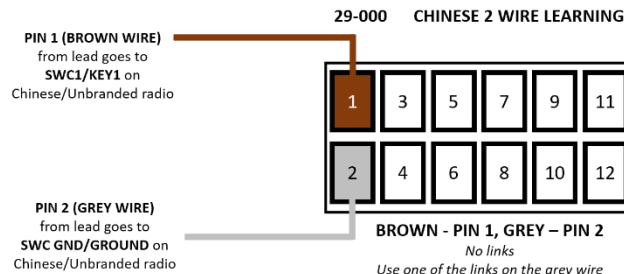

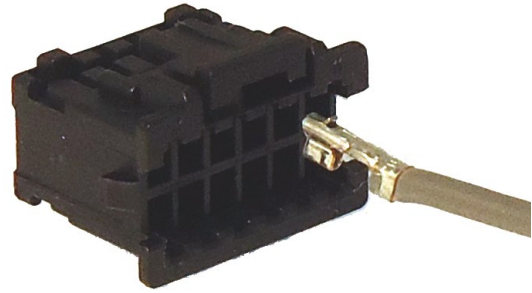


Make sure the terminals are inserted the correct way around.

Terminal orientation for top row

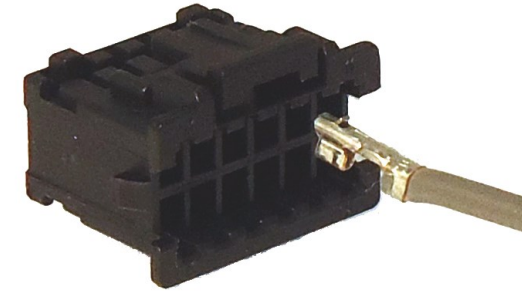


Make sure the terminals are inserted the correct way around.


Terminal orientation for top row

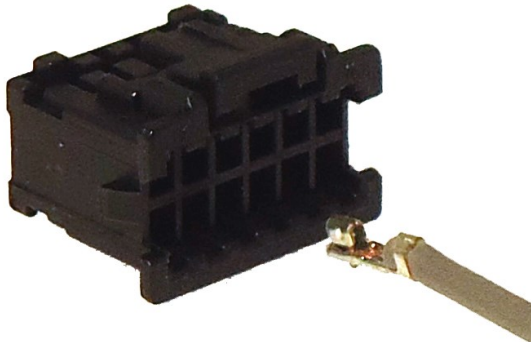

Terminal orientation for bottom row

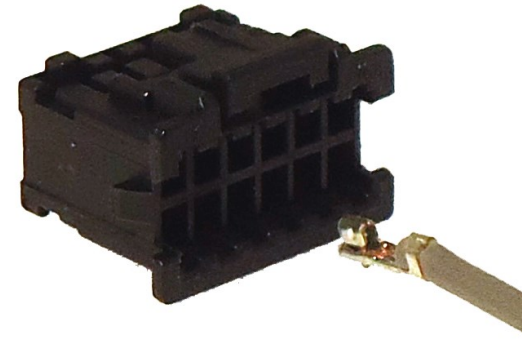


Terminal orientation for bottom row

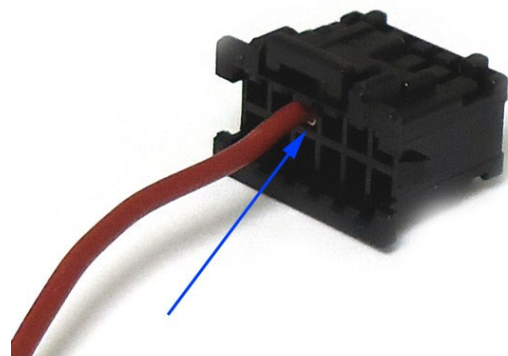


Make sure the terminals are fully inserted.

If the terminal is still visible from the wire entry side of the connector, it is not fully inserted.

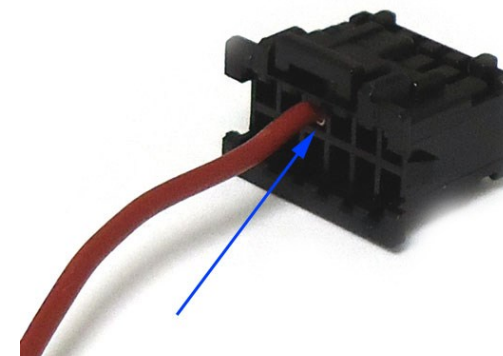


Make sure the terminals are fully inserted.

If the terminal is still visible from the wire entry side of the connector, it is not fully inserted.

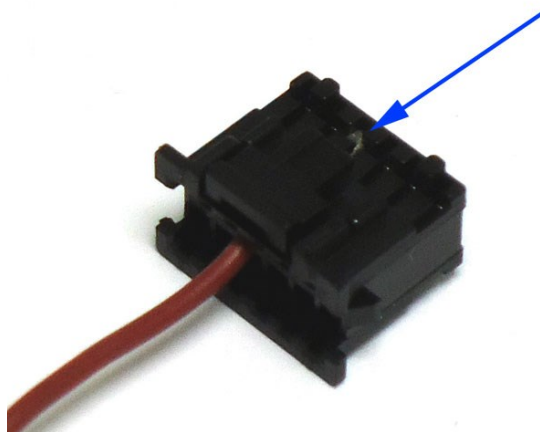

The terminal should be visible looking from above/ below the connector.

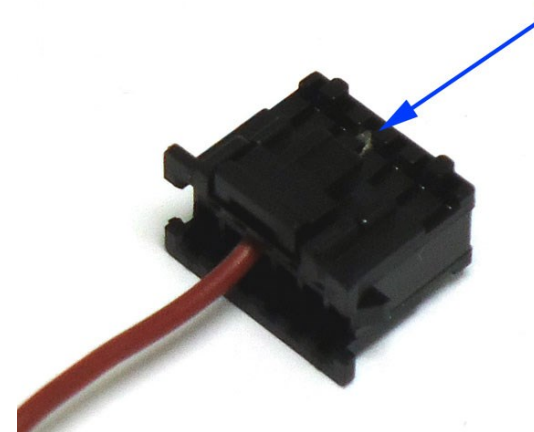

The terminal should be visible looking from above/ below the connector.